

Technical Requirements for

TAPE, TRANSPARENT, 48mm

PRODUCT SPECIFICATIONS

- Width: 48mm (± 1 mm)
- Usable Length: 50 meters
- Base Material: Biaxially-oriented Polypropylene
- Adhesion Strength: 6N/24mm (min)
- Breaking Strength: 14N/24mm (min)

EVIDENCE AND VERIFICATION

- The tape shall be wound uniformly around a core
- The brand shall be indicated in the core
- The Base Material Certification from manufacturer that the film used is Biaxially-oriented Polypropylene
- Twelve (12) rolls shall be submitted to the BAC during opening of bids for verification of the product specifications.

PACKAGING

- Six (6) rolls per pack.

REFERENCES

- PNS 2041:2008

[Handwritten mark]

[Handwritten signature]

RECOMMENDED FOR REVIEW

TECHNICAL SPECIFICATIONS REVIEW TEAM



Engr. PABLO ROMAN C. ANDRES
Member



Mr. JAYSON C. ERQUIZA
Member



Mr. JERNIMEL B. GALIT
Member

Engr. ANTONIO B. HERMIDA, JR.
Member

Ms. AMELITA F. HERNANDEZ
Member


Engr. JAIME M. NAVARRETE, JR.
Member


Mr. MERVIN IAN D. TANQUINTIC
Member

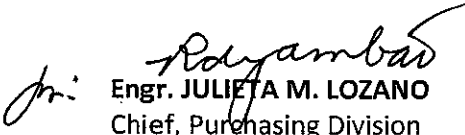

Engr. EDWARD R. SADDI
Team Leader


OCTOBER 25, 2016
Tape, Transparent, 48mm


RECOMMENDED FOR APPROVAL

TECHNICAL SPECIFICATIONS REVIEW COMMITTEE


Atty. VINCENT G. CAÑARES
OIC, BAC Support Division


Engr. JULIETA M. LOZANO
Chief, Purchasing Division


Ms. ROSA MARIA M. CLEMENTE
Senior BAC Chairperson
OIC-Deputy Executive Director V


Ms. FLERIDA G. ARIAS
OIC- Operations Group

APPROVAL

Approved: /
Disapproved: —


Ms. BINGLE B. GUTIERREZ
Executive Director

Effectivity date: November 25, 2016